

Excellence

HETEROGENEOUS VINYL

A full spectrum
of inspiration



 Tarkett

CONTENTS

CREATE DISTINCT SPACES FROM FLOORS TO WALL

3

COMPLETE DEDICATION TO WELL-BEING

5

TOTAL DESIGN FREEDOM

7

A CONCENTRATION OF TECHNOLOGY

8

ENGINEERED FOR DURABLE RESISTANCE

9

A FULL SOLUTION FOR ALL SPACES

11

LOOSE LAY SOLUTION FOR RENOVATION: ACCZENT UNIK

13

WHATEVER YOUR NEED, WE HAVE IT COVERED

15

DESIGNING AN ENVIRONMENT FOR AGEING WELL

16

THE EXCELLENCE COLLECTION

20

INSTALLING FLOORING TO ENSURE LONG LIFE

28

A METHODICAL APPROACH TO CLEANING

29

FULL SOLUTION OPTIONS

30

EXCELLENCE TENDER SPECIFICATIONS

34



PROTECTWALL
UNI - MEDIUM GREY 044
UNI - DARK GREY 041

EXCELLENCE
ORIGAMI NUMBERS - DARK GREY 181
UNI - BLACK 939

CREATE DISTINCT SPACES FROM FLOORS TO WALL

Multiply your creative possibilities when designing spaces that generate energy and well-being while ensuring resistance and durability. Tarkett's premium range of heterogeneous vinyl floor, wall and stair covering collections offers a complete solution.

The heterogeneous collection of floors offers the largest colour and design range on the market. Mix and match among the attractive and innovative hues and patterns and

combine with the Stairs and ProtectWALL collections to create bespoke ambiances from floor to wall in segments such as education, healthcare, aged care, stores and shops, hospitality or offices.

And thanks to the Excellence collection's proven technical performance, floors are long-lasting and deliver environmentally sound quality and design.


DESIGN



250+
flooring
options



MATTE
finish



Full Floor,
Wall & Stairs
coordination

PERFORMANCE



Excellent indentation
to acoustic ratio

Tapiflex Excellence (Acoustic)
0.08 mm / 19 dB*

Acczent Excellence (Compact)
0.01 mm / 3 dB*

New Compact Acoustic Option
(Acczent Platinum)**
0.03 mm / 9 dB*



Traffic resistance
0.80 mm
wearlayer on all sheet products

*Resistance to indentation / sound impact reduction

**Please refer to page 15 for conditions



PROTECTWALL

UNI - BRIGHT ICE BLUE 048
UNI - DARK GREY 041
TRANSITION - BLUE GREEN 066

EXCELLENCE

CUBIC - BRIGHT ICE BLUE 135
UNI - DARK GREY 916

COMPLETE DEDICATION TO WELL-BEING

A pillar of Tarkett's sustainability strategy has always been designing and making products that contribute to the health and well-being of occupants.

In 2014, the company therefore decided to take the radical step of eliminating phthalates from its vinyl flooring production in Europe. We replaced it with phthalate-free plasticizers that are approved for food containers and toys for young children.

Today, with the launch of our 100% phthalate-free Excellence collection, we are proactively meeting consumer concerns. For creating healthy spaces where people live, work, play and learn, Tarkett is your partner.



Completely Better Air Quality

People spend 90% of their time indoors, so good air quality is crucial. There are no phthalates in the Excellence collection and very low levels of volatile organic compounds (VOCs).

VOCs **10 µg/m³**

over 100 times lower than the EU standard EN-ISO 16000


Completely Comfortable Walking

Tarkett turns its expertise in shock absorption, usually found in sports flooring, to building occupants. Children experience greater comfort while playing on the floor, and any unfortunate falls by the elderly are cushioned.



Complete Attention to In-Room Noise

Tarkett acoustic flooring dampens noise, creating a quieter environment that is conducive to both learning and healing.

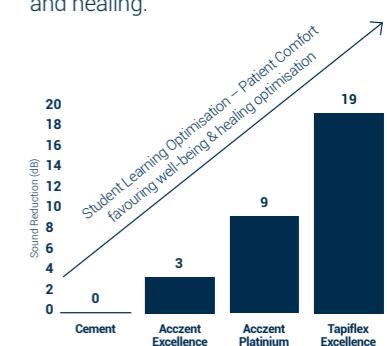



TOTAL DESIGN FREEDOM

Tarkett's Excellence collection provides a multitude of choices that meet current design trends and complement your requirements.




Total Inspiration

The largest selection of colours and designs on the market.
Play with novel ideas.

250+
flooring options


80%
new patterns



Total Harmonisation

Tarkett's Excellence range has been designed to harmonise with four new ranges:

**ProtectWALL, Tapiflex Stairs,
Acccent & Tapiflex Platinum,
and accessory collections**



Total Matte Effect

A high matte finish softens light reflected off flooring for additional occupant comfort and a more realistic look.

100% matte finish



Total Wood Realism

Unique multicolour welding rods for all wood decor give the most realistic and seamless look when installed.

Uni-coloured welding rod




Multi-coloured welding rod



Space through Light and Harmony

Energising and stimulating, light plays a major role in any space. Three types of light, beneficial, natural and smart, inspired our Excellence collection. In any space, generate wellness and warmth, revitalise and infuse energy, and encourage interaction and connection. Play with a myriad of colours, patterns and textures to create unique spaces and enhance well-being.

A CONCENTRATION OF TECHNOLOGY

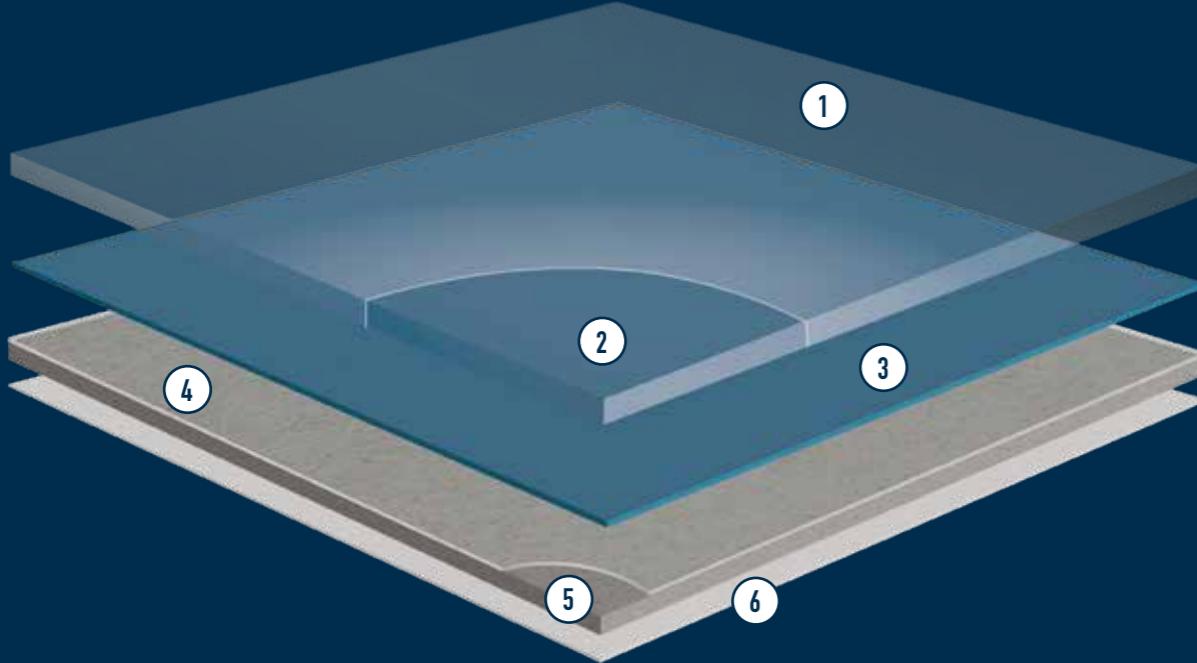

①
PUR treatment, a photo-reticulated coating, is highly resistant to abrasion and scratches

②
Pure PVC transparent wear layer – 0.80 mm on all profiles – for the best resistance to traffic and wear

③
High quality printed designs for a vast selection of colours and patterns

④
High density glass fibre non-woven reinforcement for high dimensional stability and resistance to furniture

⑤
Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing

⑥
The Tapiflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

ENGINEERED FOR DURABLE RESISTANCE

Our Excellence collection is built to withstand daily wear in all areas while also lowering the overall life-cycle cost and maintaining the floor's freshly installed appearance for longer.



Durable Wear on All Products

NEW!

0.80 mm
on both acoustic (Tapiflex)
& compact (Accent) options

In order to adapt to building-specific requirements.

NEW!

0.03 mm / 9 dB
Compact acoustic option

(Accent Platinium)

For high traffic areas requiring medium acoustic performance, ask about our compact 1mm wear layer compact acoustic flooring.



Durable Resistance to Indentation

Each layer is coated onto the previous one, creating a fused product highly resistant to the wear and tear of daily life. The flooring is impervious to indentation and tearing.

Tapiflex

0.08 mm

Resistance to indentation (best measured value)

Accent

0.01 mm




Durable Rolling Capability

Less force is required and it is easier to push trolleys and medical beds*.

*internal testing

29% improved rollability on compact& acoustic profiles

(vs. former range)

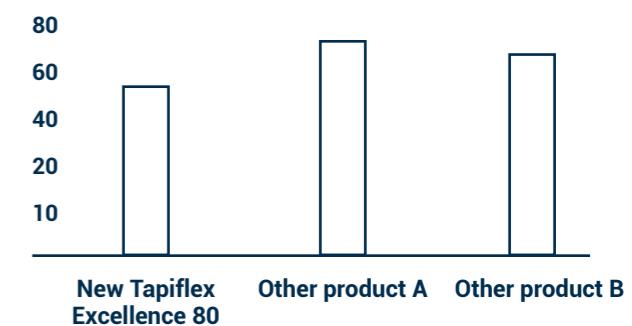

Minimal Maintenance

Resisting stains in numerous environments, floors can be cleaned using a little water and neutral detergents to maintain cleanliness between mechanical buffings.

Up to 25% reduction in the cost of maintenance and cleaning*

*Refer to Tarkett Life Cycle Cost (LCC) software



A FULL SOLUTION FOR ALL SPACES

The Excellence collection has been designed to harmonise with ProtectWALL, Acczent & Tapiflex Platinium, Tapiflex Stairs and accessory ranges. We have taken this a step further; patterns that are identical across the range have been developed to help your architectural project benefit from a coordinated design across all areas. Install the full solution!

Wetroom Concept


For a watertight design solution
(Floor: 89 colour options
Wall: 77 colour options)

ProtectWALL

For maximum impact,
stain & scratch resistance
(50 colour options)

Accessibility Tactile warning strips

To ensure safety and guidance

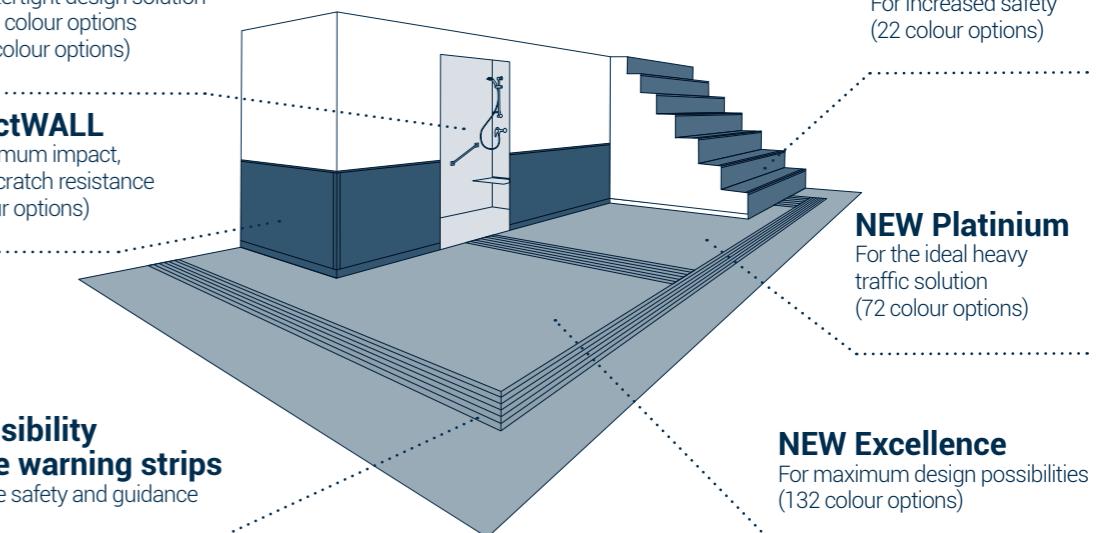

Tapiflex Stairs

For increased safety
(22 colour options)

NEW Platinium


For the ideal heavy
traffic solution
(72 colour options)

NEW Excellence

For maximum design possibilities
(132 colour options)

Accessories for a perfect finish

Optimise building orientation, navigation and safety with our dedicated range of accessories.




WELDING RODS
Secure the junction between two rolls of flooring or wall and floor coverings. Unique multicolour welding rods for wood patterns.



SET-ON SKIRTING
KS 61: PVC semi-rigid skirting for decorative use.
Article code: 1411 + colour code
(please refer to reference list, page 31)



TRANSITION PROFILE
Used to join different floorings of the same or slightly different heights.
Order code:
Dark grey: 1452 000 / Light grey: 1452 001 /
White: 1452 002



PRE-FORMED SKIRTING
Pre-formed set-in skirting made of PVC flooring, reinforced with polymer on backside. Welded to the floor covering and glued to the wall.
60/80/100 × 100 / 200 × 2400mm.
Available on request in all colours

ALSO AVAILABLE

- Accessibility items: tactile guide strips, tiles, studs
 - Expansion joints
 - Tarkoprotect
- Please also ask for more information from your Tarkett rep.



PROTECTWALL
JUNGLE - TONIC 068
TISSAGE - SOFT LIGHT GREEN 131

EXCELLENCE
TISSAGE - SOFT WATER 134
TISSAGE - SOFT LIGHT GREEN 131
OAK TREE - NATURAL 200

LOOSE LAY SOLUTION FOR RENOVATION: ACCZENT UNIK

Make the most of resources without compromising on quality during renovation work – and new builds – using Tarkett's Acczent Unik compact loose lay rolls. Installing quickly and easily, their durability has been proven through long years of resisting high traffic levels in buildings throughout Europe.

Installation Performance

Acczent Unik is easy to install and remove, saving time and money. Install directly on subfloors, and use the floor immediately after installation.



Extreme resistance to traffic

25 m² fully installed in 2 hours,
40% faster
than glue-down flooring

Resists to 75,000 cycles castor chair test,

25% over European Standard requirements



Resistance Performance

10 years

of resisting high traffic in areas like entrances and corridors are proof of Acczent Unik's capacity to withstand marks, abrasions and scratches, and indentation.



Design Performance

A widened range includes new, fresh and colourful options for Education and Offices, as well as wood and mineral tones ideal for Aged Care facilities. 100% matching with Acczent and Tapiflex glue-down flooring.

NEW! 15 colours

Extended colours available on demand

0.80 mm wear layer,
suitable for Class 34/43 buildings

Compatible with asbestos subfloors
No need to undertake the costly removal of asbestos tiles. Simply cover them up. Monitor easily throughout the flooring's life.

0.01 mm*
best-in-class resistance to indentation

* best measured value

Dedicated post-use recycling programme

To ensure participation in a circular economy model.

Individualised designs with Floortcraft service

For your projects requiring individually customised designs with logos, brand colours or other visual elements, Tarkett Floortcraft offers unique bespoke designs created by our **FLOORCRAFT design service using sonic cut**. Designs can be tailored to the aesthetic and commercial requirements and shape of any floor area. Floortcraft designs are assembled in the factory and delivered to the site. Detailed layout plans make it fast and simple to install.

For more information: professionals.tarkett.com/content/floortcraft-design-service



EXCELLENCE

FUSION LINES - TURQUOISE 25135176

UNI - BRIGHT EXTREME BLUE 25136941

WHATEVER YOUR NEED, WE HAVE IT COVERED

From your specific needs based on building constraints, optimal budget management and design customisation to jobsite waste management, Tarkett accompanies you throughout your design and building process.

Product options

In addition to our standard, permanently available collection, we offer further options to meet specific requirements. All products can be produced with a selection of colours in the full Excellence range as a special arrangement. See conditions below.

PRODUCTS	MINIMUM ORDER QUANTITY	LEADTIME
Acczent Platinium (Compact acoustic 9 dB – 1 mm Wear Layer)	600 m ²	5 weeks
Acczent Unik Loose Lay	1,100 m ²	5 weeks
Tapiflex Tiles	1,100 m ²	5 weeks

Post-Installation Clean-up

Get flooring offcuts collected and recycled with Tarkett's comprehensive ReStart programme.

- Job site waste is reduced.
- Job site waste management is optimised.
- Guaranteed traceability of collected off-cuts.
- Sustainable development is integrated, anticipating European regulation requirements.



Reducing the Cost of Flooring during its Full Lifespan

Your project's global budget dedicated to flooring includes not only purchase and installation but must also cover cleaning and maintenance operations performed on the floor during its lifespan.

Tarkett's highly resistant surface treatment, TopClean XP – no polish and no wax for life – facilitates and shortens cleaning operations and lowers consumption of chemicals, water and electricity, generating significant savings and limiting environmental impact at the same time.

Your Tarkett contact is at your disposal to help you the complete a Life Cycle Cost estimate for your facility or project.

LCC Calculation

Purchase & installation Cleaning & maintenance


8% of total flooring cost* **92% of total flooring cost***

*average

DESIGNING AN ENVIRONMENT FOR AGEING WELL

We are living longer thanks to advances in the healthcare segment. But with ageing come declining faculties and specific challenges. Dementia may cause further complications.

People with dementia typically experience memory problems, have difficulty processing information and are less able to communicate. The condition also impacts their perception of their surroundings, leaving them unable to relate what they see to physical reality or to perceive objects in three dimensions. These difficulties can generate stress and anxiety. It is therefore important to design aged care facilities with dementia in mind.

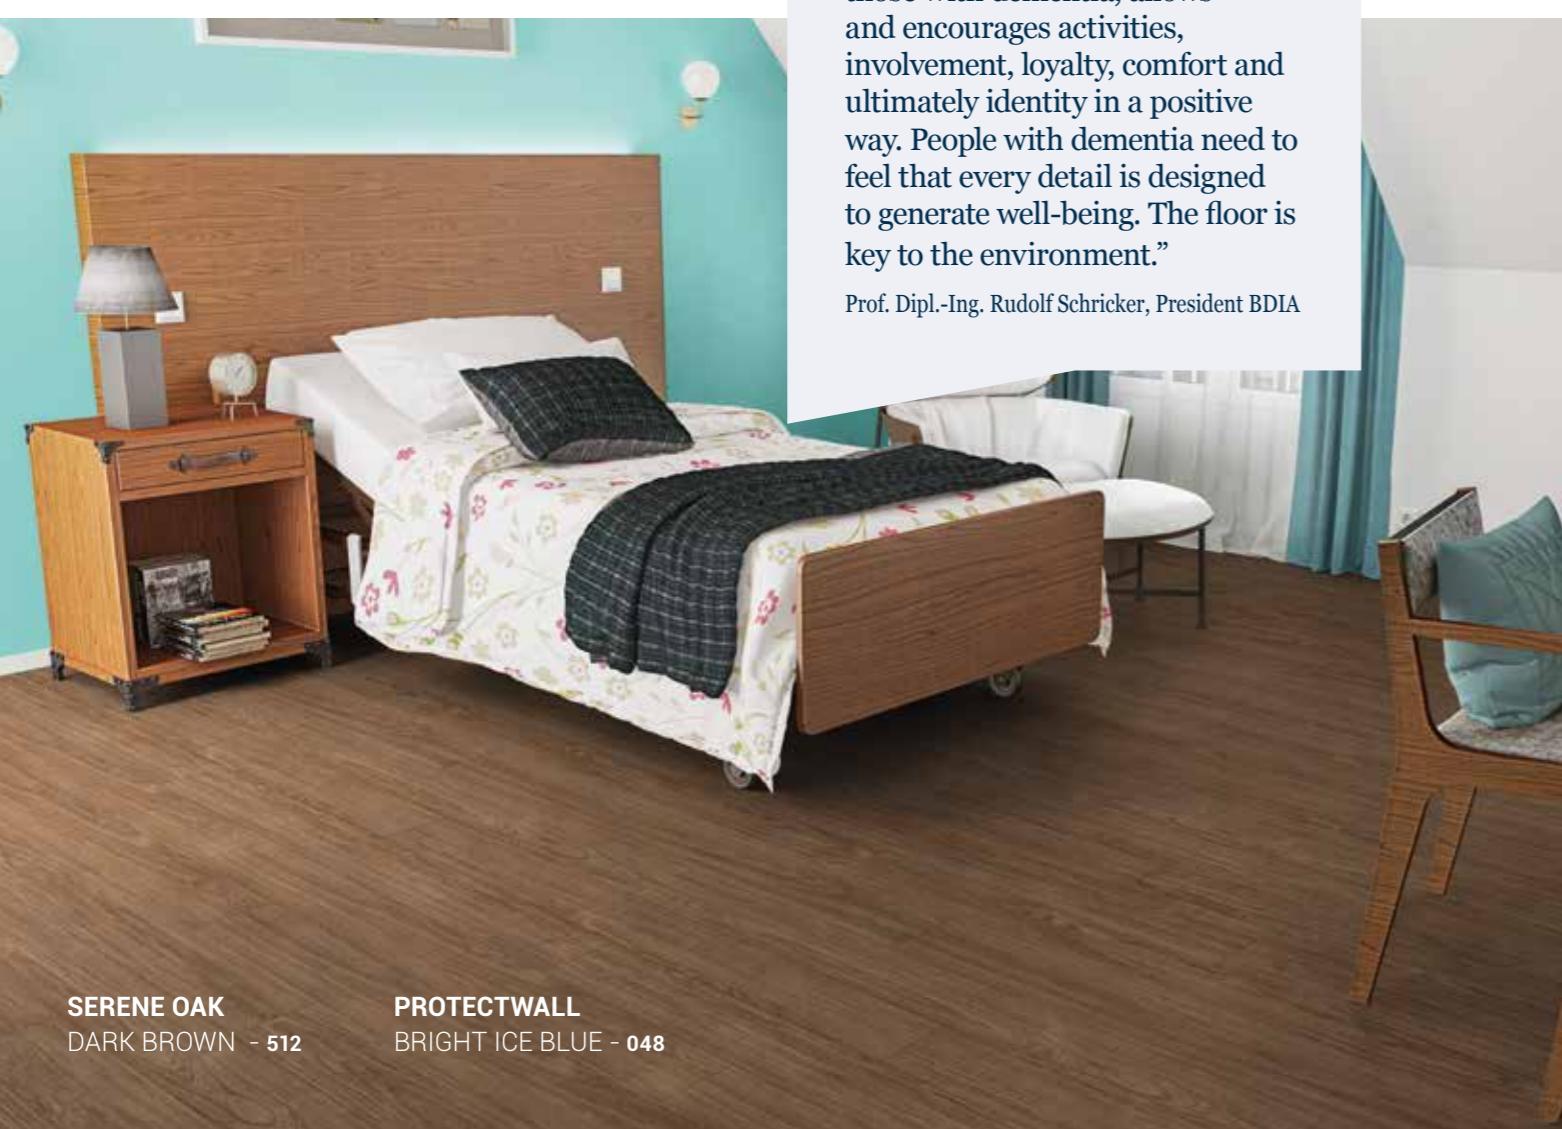

SERENE OAK
DARK BROWN - 512

PROTECTWALL
BRIGHT ICE BLUE - 048



USE THE RIGHT PATTERN TO CREATE A HOME LIKE FEELING

Comfort is the key word when welcoming a person into their new home. Familiar designs with subtle patterns or textures will contribute to avoiding an institutional feeling. Particular attention should be paid to the choice of designs. Avoid busy patterns which may be misinterpreted and can cause anxiety for people living with dementia.



USE Plain patterns, material effects with subtle pattern



Tissage-Soft Grey
25128 127



Twine-Indigo
25128 140



Serene Oak-Warm Brown
25204 511



Fiber Wood-Natural
25128 303



CHOOSE Calm and subtle patterns
Tarkett specially developed wood patterns, without knots, in line with dementia guidelines.



Serene Oak-Medium Grey
25204 508



Serene Oak-Brown Grey
25204 509



Serene Oak-Red Brown
25204 510



Serene Oak-Warm Brown
25204 511



Serene Oak-Dark Brown
25204 512




AVOID busy patterns, dark colours and high-contrast designs



Terrazzo-Terracotta
25128 104



Bubbles-Cold Mix
25130 143



Facet-Black & White
25128 118



Cubic-Bright Anis
25130 164



PROVIDE OPTIMUM CONTRAST TO FACILITATE VISUAL PERCEPTION

As the eye's lens gradually yellows with age, our colour perception is affected. We are less able to perceive contrast, colours become less vivid and more monochrome (red can start to look like pink) and we have trouble distinguishing shades of blue or green. Colour contrast is therefore key to providing visual clues for doors, handles, controls and furniture, thereby enabling people with poor sight to better make sense of their surroundings.


Use Light Reflection Value (LRV) to create contrast

The light reflectance value is the total quantity of light reflected by a surface when illuminated by a light source. The LRV scale runs from 0, which is the darkest or least reflective, to 100, which is the lightest or most reflective. Taking LRV into account can help understand how much contrast is visible.

Use **strong contrast** between **floors and wall** and between **furniture and floors** to enhance visual perception:
LRV difference > 30 points.

Use **low contrast** for a smooth transition **from bedroom to the wetroom and from bedroom to the corridor**.
LRV difference < 10 points.

Examples of Light Reflectance Values

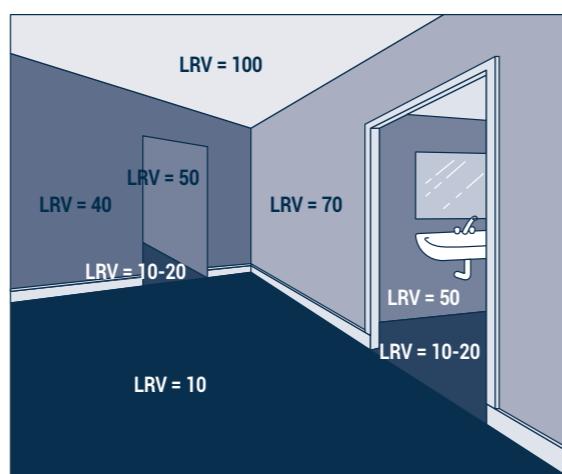


CHECK OUR DEMENTIA FRIENDLY DESIGNS

Dementia friendly designs are qualified by their pattern and their light reflection value. As far as the pattern is concerned, our designs have been checked by the University of Stirling's Dementia Services Development Centre (DSDC) and rated 1a and 1b:

- 1a: Finishes within this rating are plain and can be used indiscriminately
- 1b: Finishes within this rating are semi-plain (minimal texture or fleck and / or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

As far as LRV is concerned, our flooring designs present values between 10 and 40.

In the following collection pages, you will find "Dementia friendly" designs flagged with this logo.
And for more information, please contact your local Tarkett sales rep.




MAKE THE RIGHT COMBINATIONS

Some examples

Wall



Aquarelle HFS:
Stone light warm grey
LRV = 74



WETROOM



MS Aqua:
Concrete warm grey
LRV=15



Excellence:
Uni Intense kaki
LRV=25

ProtectWall: Tissé
Light aqua
LRV=53



CORRIDOR



Floor



Aquarelle HFS:
Uni Yellow
LRV=67



WETROOM



Excellence:
Serene oak red brown
LRV=14

ProtectWall:
Tissé Warm grey
LRV=76




CORRIDOR



Excellence:
Uni Intense terracotta
LRV=23

THE EXCELLENCE COLLECTION

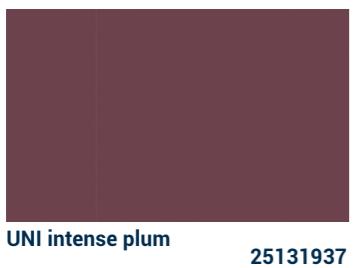


UNI intense plum 25131937




FACET prune 25128121


All decors are also available in acoustic, and certain in acoustic tile version.

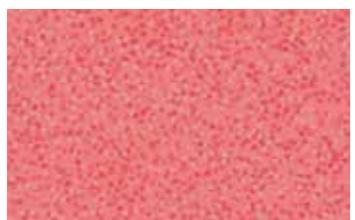

FLOCONS² red 25128169

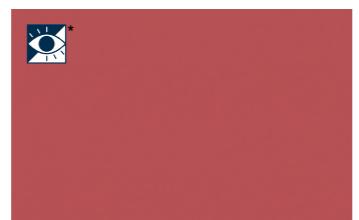

UNI bright red 25131928

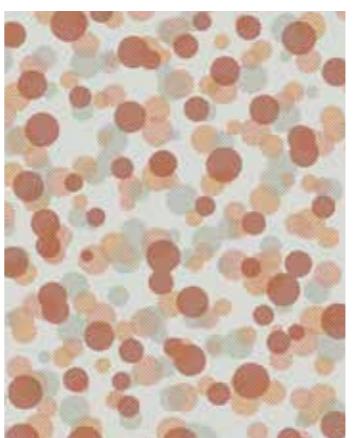


BUBBLES warm mix 25130142



FUSION LINES bright violet 25130177



TISSAGE soft pink 25128135

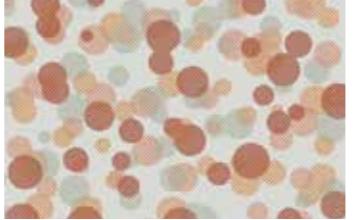

FACET anis 25128114



UNI bright pink 25131927




CUBIC bright orange 25130163




TISSAGE soft orange 25128132



MATRIX² bright orange 25131188

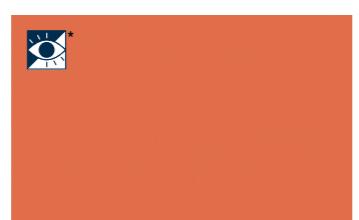

UNI bright orange 25131929

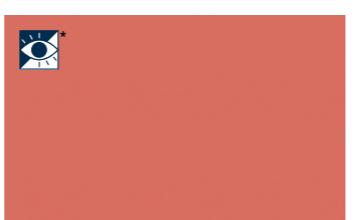

UNI intense terracotta 25131942



FACET orange 25128112



CUBIC bright orange 25130162

Printed version of colours may vary in shade from the original product and scale is approximate in order to give the best rendering of the overall structural effect of the pattern.




FACET yellow 25128113



MATRIX² bright yellow 25131187



TISSAGE soft yellow 25128133



UNI bright yellow 25131930



CUBIC bright yellow 25130163



FACET anis 25128114



MATRIX² bright anis 25131186



UNI bright anis 25131931



ORIGAMI NUMBERS anis 25130179



CUBIC bright anis 25130164



DIGITAL WAVE grey anis 25130184




TISSAGE soft light green 25128131




FUSION LINES intense olive 25130175



UNI intense olive 25131938



BUBBLES cold mix 25130143

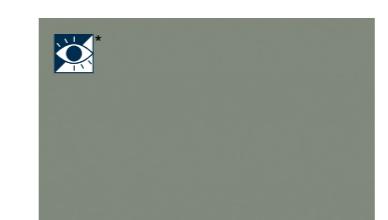

UNI intense kaki 25131934




CARPET intense olive 25128106

All decors are also available in acoustic, and certain in acoustic tile version.




DIAMOND blue green 25128124




FUSION LINES turquoise 25130176



MATRIX² bright turquoise 25131185



UNI bright ice blue 25131932



FACET water 25128115



TWINE turquoise 25128139



TISSAGE soft water 25128134



UNI intense petrol 25131935



UNI bright dark turquoise 25131933



CUBIC bright ice blue 25130165



CUBIC intense petrole 25130166



UNI intense water 25131936



FUSION LINES intense petrol 25130174



UNI bright turquoise 25131926



DIGITAL WAVE grey ice blue 25130182




FLOCONS² rainbow 25128170




FACET blue 25128120



TWINE indigo 25128140



FACET black & white 25128118



UNI white 25131940



ENCRYPTION black & white 25128189



UNI bright extreme blue 25131941



DIAMOND blue 25128123



UNI intense jean 25131943



ALLOVER WOOD white 25129714



UNI black 25131939



FACE mid grey 25128116



CARPET intense jean 25128107



TISSAGE soft light blue 25128130



ALLOVER WOOD black 25129713




FUSION LINES dark grey 25130172

Printed version of colours may vary in shade from the original product and scale is approximate in order to give the best rendering of the overall structural effect of the pattern.

All decors are also available in acoustic, and certain in acoustic tile version.



FUSION LINES phospho 25130171



FACET fonte 25128117



ORIGAMI NUMBERS dark grey 25130181




ORIGAMI NUMBERS light grey 25130180




DIGITAL WAVE grey 25130183



BRUSHED ALU grey 25130100

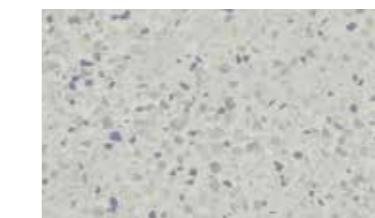


TERRAZZO blue 25128105




STEEL grey 25128601




GRANITO cool grey 25128111

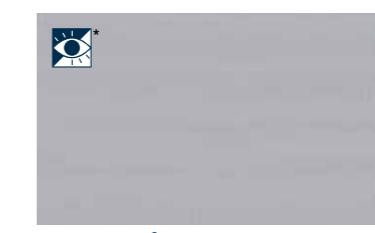


TISSAGE soft grey 25128127



SCANDINAVIAN OAK medium grey 25129401



UNI dark grey 25131916



UNI medium grey 25131917



MATRIX² graphite 25131000




TAPPED METAL grey 25128126




SCANDINAVIAN OAK dark grey 25129400



CONCRETE cool grey 25128500



UNI warm grey 25131925




CONCRETE steel blue 25128507




MATRIX² phospho 25131101




CARPET white grey 25128108

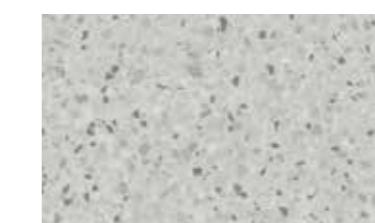


TERRAZZO green 25128103



GRANITO warm grey 25128110



ESQUISSE dark grey 25128015




ESQUISSE medium grey 25128014



CONCRETE dark grey 25128501



SERENE OAK medium grey 25119508

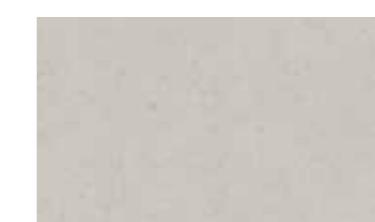


CONCRETE chalk 25128502



SCANDINAVIAN OAK light beige 25129402




MATRIX² dark grey 25131019



TWINE dark grey 25128138



DIAMOND grey 25128125



ESQUISSE light grey 25128013



OAK TREE grey 25129202



SERENE OAK brown grey 25119509

Printed version of colours may vary in shade from the original product and scale is approximate in order to give the best rendering of the overall structural effect of the pattern.



CONCRETE warm grey 25128504



ALLOVER WOOD grege 25129711

All decors are also available in acoustic, and certain in acoustic tile version.



FACET beige 25128119



TISSAGE soft beige 25128129



BEECH LONGSTRIPE light 25127102



SERENE OAK warm brown 25119511




FIBER WOOD grege 25128302



BRUSHED OAK light 25127027



TRIANGLE WOOD chalk 25128136



WASHED OAK white 25127817



FUSION LINES beige 25130173



ESQUISSE light chocolate 25128017



OAK LONGSTRIPE natural 25127002



TERRAZZO terracotta 25128104




GRANITO light beige 25128109



LONG MODERN OAK white 25129005



CUBIC dark beige 25130167



OAK TREE beige 25129200



MODERN MAPLE maple 25128141



LONG MODERN OAK grege 25129008



TISSAGE soft grege 25128128



SCANDINAVIAN OAK medium beige 25129403



TRIANGLE WOOD natural 25128137



LONG MODERN OAK natural 25129010



FIBER WOOD natural 25128303



BRUSHED OAK medium 25127026



CONCRETE grey beige 25128503




ESQUISSE grey beige 25128012



OAK LONGSTRIPE light 25127001



WASHED OAK natural 25127818



SERENE OAK red brown 25119510

Printed version of colours may vary in shade from the original product and scale is approximate in order to give the best rendering of the overall structural effect of the pattern.

INSTALLING FLOORING TO ENSURE LONG LIFE

Tarkett has a wide variety of techniques and tips to ensure perfect installation and keep your flooring in good condition for years to come.


STEPS IN INSTALLING

1. Subfloor control




- The subfloor must be sound, hard, flat, clean and free from all types of marks, debris & residues, and not exposed to humidity.
- Absorbency must be checked and when needed, treated with a primer to have moderately absorbent subfloor.
- Refer to local standards for detailed rules and control methods.
- Stop underfloor heating for minimum 48h before installation and maintain the temperature in the room with an alternative heating source.

2. Before installation

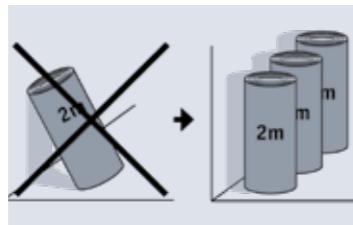


- Store 2m large rolls vertically in storage area. Larger rolls should be stored horizontally.
- Let the flooring acclimate at least 24h before laying and cut sheets should be relaxed another 24h, both at room temperature.
- Define your layout to ensure whenever possible that joins do not coincide with doorways and main traffic lanes.
- If the room is square, the sheets should run parallel to the incoming light. In long, narrow rooms the sheets can be installed along the length of the room.

3. Rolls installation

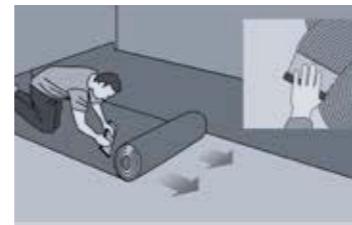

- Butt join when edges are straight, if not, overlap the edges and trim the two sheets simultaneously (double cut method).
- Fold the first half of the sheets.
- Apply acrylic adhesive with a spatula (TKB A1 for compact, TKB A2 for acoustic) - refer to adhesive manufacturer's instruction for waiting time.
- Fold back the first half of the flooring into the adhesive and press.
- Repeat this operation on the other half
- Excess of material close to walls and obstacles can be trimmed/flushed (freehand cut).
- Use a heavy roller on the whole surface to ensure final bonding.

4. Hot welding

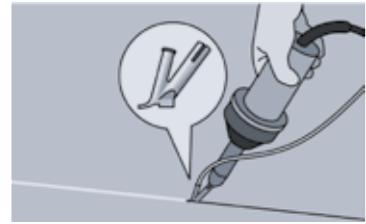

- Wait minimum 24h after installation.
- Hot weld with 4mm PVC welding rod: groove (2/3 of the compact layer) and weld at approx. 400°C with a hot speed nozzle.
- Trim the welding rod in 2 steps (immediately and after 5 minutes) with a Mozart knife.

5. After installation

For more detailed explanations, or specific installation methods (cove forming, tiles installation, Accent Unik loose-lay installation), please refer to full installation notice. Please contact your local representative for any questions. Tarkett accepts no liability for adhesives and levelling compounds used, including those recommended.

A METHODICAL APPROACH TO CLEANING

Tarkett's PUR surface treatment facilitates cleaning and decreases the need for water and solvents, reducing environmental impact. Regular and attentive cleaning maintains flooring in between periodic deep-clean buffing sessions.

General Advice

- Clean the floorcovering regularly, as this is more cost-effective and hygienic than occasional heavy-duty cleaning.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality floor protectors. Felt pads are not recommended in commercial interiors. Hard plastic is preferred.

- Install doormats at the entrance of the buildings to catch humidity, dirt, dust etc. They must be at least three strides long (approx. 1.5 m).
- Always follow manufacturers' recommendations (detergent, cleaning machine...).

SETTING IN TRAFFIC	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	<ul style="list-style-type: none"> Dry mopping. Vacuum cleaning.
	2. Cleaning	<ul style="list-style-type: none"> Mechanical cleaning with scrubbing machine – red pad, medium speed – and water vacuuming, or combined machine. Use neutral detergent (pH 6/8) or alkaline detergent (pH 8/12) in case of heavy soiling. If an alkaline detergent (pH 8/12) is used, the flooring should be rinsed with water and water vacuumed.
	3. Stain removal	<ul style="list-style-type: none"> A detergent should be used to remove work-site stains (glue, paint...) according to the nature of the stain. Do not use abrasive pads.
DAILY CLEANING	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	<ul style="list-style-type: none"> Dry mopping. Vacuum cleaning.
	2. Cleaning (if and where it's necessary)	<ul style="list-style-type: none"> With flat or micro fibre mop, impregnated or not. With a combined machine (red pad, medium speed). Use neutral detergent (pH 6/8).
	3. Stain removal	<ul style="list-style-type: none"> For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.
PERIODICAL CLEANING	ACTIONS	INSTRUCTIONS
	1. Light soiling	<ul style="list-style-type: none"> Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed Use detergent neutral or alkaline (pH 7/9)
	2. Heavy soiling	<ul style="list-style-type: none"> Apply a cleaning solution (pH 10-11, after dilution) to the flooring and allow to act for 5-10 min. Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed. Vacuum up the soiled water immediately. Rinse with clean water and allow the floor to dry.
	3. Stain removal	<ul style="list-style-type: none"> For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.

					ACCZENT EXCELLENCE/TAPIFLEX EXCELLENCE (ROLLS TO BE GLUED)	ACCZENT UNIK (LOOSE LAY ROLLS)	TAPIFLEX TILES (TO BE GLUED)	TAPIFLEX STAIRS	PROTECTWALL 1.5	MATCHING SKIRTINGS	MATCHING WR	
Design	Colour	NCS	NCS lightness (%)	LRV (%)	Accent (Compact)	Tapiflex (Acoustic)	Unik (Compact)	Tapiflex (Acoustic)		KS 61	Unicolour	Multicolour
BRUSHED ALU	GREY	S 4500-N	0,54	26,5	25130100	25135100	–	✓*	ESQUISSE STAIRS light grey 25171018	UNI warm grey 26500043	1411 021	1287006
BUBBLES	COLD MIX	S 2500-N	0,74	39	25130143	25135143	–	✓*	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 013	1287412
	WARM MIX	S 2500-N	0,74	44,3	25130142	25135142	–	✓*	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 012	1287412
CARPET	INTENSE JEAN	S 6005-R80B	0,36	19	25128107	25133107	✓*	✓*	UNI STAIRS medium alu 25172118	UNI warm grey 26500043	1411 009	1292450
	INTENSE OLIVE	S 4010-G90Y	0,56	27,6	25128106	25133106	✓*	✓*	CONCRETE STAIRS cool grey 25171000	UNI intense olive 26500047	1411 009	1287330
	WHITE GREY	S 2502-Y	0,73	41,5	25128108	25133108	✓*	✓*	TISSAGE STAIRS soft grege 25171032	UNI white grey 26500132	1411 012	1287716
CONCRETE	CHALK	S 2502-Y	0,73	46,3	25128502	25133502	25070502	25185502	TISSAGE STAIRS soft grege 25171032	CONCRETE chalk 26500059	1411 010	1287572
	COOL GREY	S 3500-N	0,64	36,3	25128500	25133500	25070500	25185500	CONCRETE STAIRS cool grey 25171000	CONCRETE cool grey 26500058	1411 012	1287524
	DARK GREY	S 6502-Y	0,34	12,6	25128501	25133501	25070501	✓*	UNI STAIRS medium alu 25172118	UNI warm grey 26500043	1411 008	1287585
	GREY BEIGE	S 3005-Y20R	0,67	33,4	25128503	25133503	✓*	✓*	TISSAGE STAIRS soft grege 25171032	CONCRETE chalk 26500059	1411 010	1287713
	STEEL BLUE	S 6500-N	0,35	13,2	25128507	25133507	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI dark grey 26500041	1411 053	1287836
	WARM GREY	S 6005-Y20R	0,38	18,8	25128504	25133504	✓*	✓*	ESQUISSE STAIRS light grey 25171018	CONCRETE chalk 26500059	1411 012	1287870
CUBIC	BRIGHT ANIS	S 5020-B50G	0,39	31,7	25130164	25135164	–	–	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 009	1294073
	BRIGHT ICE BLUE	S 2020-B60G	0,71	32,7	25130165	25135165	–	–	UNI STAIRS bright ice blue 25172122	UNI bright ice blue 26500048	1411 054	1294073
	BRIGHT ORANGE	S 1070-Y70R	0,53	25,1	25130162	25135162	–	–	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 008	1294073
	BRIGHT YELLOW	S 2050-Y	0,69	31,4	25130163	25135163	–	–	UNI STAIRS bright yellow 25172120	UNI bright yellow 26500037	1411 009	1294073
	INTENSE PETROLE	S 5020-B30G	0,57	22,5	25130166	25135166	–	–	UNI STAIRS grey 25172117	UNI dark aqua 26500135	1411 054	1294073
	DARK BEIGE	S 4005-Y20R	0,39	26,2	25130167	25135167	–	–	UNI STAIRS dark beige 25172116	UNI dark grey 26500041	1411 009	1294073
DIAMOND	BLUE	S 5030-R90B	0,30	11,6	25128123	25133123	✓*	–	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 009	1287515
	BLUE GREEN	S 5030-B30G	0,32	12,5	25128124	25133124	✓*	–	UNI STAIRS bright ice blue 25172122	UNI green celadon 26500038	1411 009	1287461
	GREY	S 6500-N	0,35	15,5	25128125	25133125	✓*	–	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 009	1287753
	ORANGE	S 2060-Y70R	0,47	20,9	25128122	25133122	✓*	–	NEON STAIRS bright orange 25172026	UNI medium grey 26500044	1411 009	1287517
DIGITAL WAVE	GREY	S 3502-B	0,62	40	25130183	25135183	–	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 041	1287845
	GREY ANIS	S 6502-Y	0,34	14,5	25130184	25135184	–	✓*	NEON STAIRS bright anis 25172028	UNI bright anis 26500039	1411 008	1287647
	GREY ICE BLUE	S 6500-N	0,35	14,4	25130182	25135182	–	✓*	NEON STAIRS bright ice blue 25172029	UNI bright ice blue 26500048	1411 056	1287836
ENCRYPTION	BLACK & WHITE	S 7500-N	0,26	9	25128189	25133189	✓*	✓*	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 047	1287529
ESQUISSE	DARK GREY	S 6500-N	0,35	14,9	25128015	25133015	✓*	25185015	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 008	1287375
	GREY BEIGE	S 2502-Y	0,73	47,3	25128012	25133012	✓*	✓*	ESQUISSE STAIRS light grey 25171018	CONCRETE chalk 26500059	1411 011	1287572
	LIGHT CHOCOLATE	S 6005-Y50R	0,38	20	25128017	25133017	✓*	✓*	ESQUISSE STAIRS light grey 25171018	TISSE grey 2650004	1411 007	1287458
	LIGHT GREY	S 4502-Y	0,53	30,6	25128013	25133013	✓*	25185013	ESQUISSE STAIRS light grey 25171018	CONCRETE cool grey 26500058	1411 008	1287854
	MEDIUM GREY	S 6000-N	0,40	19	25128014	25133014	✓*	25185014	ESQUISSE STAIRS dark grey 25171015	UNI medium grey 26500044	1411 008	1287832
FACET	ANIS	S 2050-G90Y	0,69	39,4	25128114	25133114	✓*	✓*	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 036	1287137
	BEIGE	S 5010-Y10R	0,48	28,6	25128119	25133119	✓*	✓*	UNI STAIRS dark beige 25172116	TISSE grey beige 26500057	1411 054	1287830
	BLACK & WHITE	S 5500-N	0,44	21,8	25128118	25133118	✓*	✓*	ESQUISSE STAIRS light grey 25171018	UNI super white 26500221	111 039	1287840
	BLUE	S 5030-R80B	0,28	8	25128120	25133120	✓*	✓*	UNI STAIRS medium grey 25172123	UNI bright extreme blue 26500042	1411 012	1287580
	FONTE	S 5502-B	0,43	12,5	25128117	25133117	✓*	✓*	UNI STAIRS grey 25172117	UNI dark grey 26500041	1411 009	1287392
	MID GREY	S 4000-N	0,59	32,2	25128116	25133116	✓*	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 011	1287831
	ORANGE	S 2060-Y70R	0,47	25,1	25128112	25133112	✓*	✓*	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 020	1287158
	PRUNE	S 6020-R10B	0,26	9,3	25128121	25133121	✓*	✓*	UNI STAIRS dark beige 25172116	UNI intense plum 26500051	1411 011	1287649
	WATER	S 4020-B70G	0,49	25,3	25128115	25133115	✓*	✓*	UNI STAIRS bright ice blue 25172122	UNI green celadon 26500038	1411 036	1288311
	YELLOW	S 2050-Y10R	0,69	39,9	25128113	25133113	✓*	✓*	UNI STAIRS bright yellow 25172120	UNI bright yellow 26500037	1411 028	1287653
FLOCONS ²	RAINBOW	S 2000-N	0,79	48,1	25128170	25133170	✓*	✓*	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 055	1287837
	RED	S 2050-Y90R	0,50	25,2	25128169	25133169	✓*	✓*	UNI STAIRS medium alu 25172118	UNI bright red 26500045	1411 048	1287868
FUSION LINES	BEIGE	S 3005-Y20R	0,67	36,3	25130173	25135173	–	✓*	TISSAGE STAIRS soft grege 25171032	UNI light beige 26500122	1411027	1287707
	BRIGHT ORANGE	S 2060-Y70R	0,47	25,4	25130178	25135178	–	✓*	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411020	1287154
	BRIGHT VIOLET	S 4040-R30B	0,29	14,2	25130177	25135177	–	✓*	NEON STAIRS bright orange 25172026	UNI bright orange 26500036	1411020	1287823
	DARK GREY	S 6000-N	0,40	16,6	25130172	25135172	–</td					

					ACCZENT EXCELLENCE/TAPIFLEX EXCELLENCE (ROLLS TO BE GLUED)	ACCZENT UNIK (LOOSE LAY ROLLS)	TAPIFLEX TILES (TO BE GLUED)	TAPIFLEX STAIRS	PROTECTWALL 1.5	MATCHING SKIRTINGS	MATCHING WR		
Design	Colour	NCS	NCS lightness (%)	LRV (%)	Accent (Compact)	Tapiflex (Acoustic)	Unik (Compact)	Tapiflex (Acoustic)			KS 61	Unicolour	Multicolour
TERRAZZO	BLUE	S 2502-Y	0,73	43,2	25128105	25133105	✓	✓*	CONCRETE STAIRS cool grey 25171000	CONCRETE cool grey 26500058	1411 013	1292770	
	GREEN	S 2502-Y	0,73	39,6	25128103	25133103	✓	✓*	GRANITO STAIRS grey 25171012	UNI green celadon 26500038	1411 035	1292770	
	TERRACOTTA	S 2502-Y	0,73	47,7	25128104	25133104	✓	✓*	GRANITO STAIRS beige 25171013	CONCRETE chalk 26500059	1411 012	1292770	
TISSAGE	SOFT BEIGE	S 2005-Y40R	0,77	46,3	25128129	25133129	✓*	✓*	OAK TREE STAIRS beige 25171030	UNI light beige 26500122	1411 027	1287707	
	SOFT GREGE	S 3005-Y20R	0,67	42,5	25128128	25133128	25070128	✓*	TISSAGE STAIRS soft grege 25171032	TISSE grey beige 26500057	1411 027	1287572	
	SOFT GREY	S 3500-N	0,64	37,9	25128127	25133127	✓*	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 011	1287459	
	SOFT LIGHT BLUE	S 3010-B10G	0,63	32,8	25128130	25133130	25070130	✓*	UNI STAIRS medium grey 25172123	UNI white blue 26500049	1411 042	1291817	
	SOFT LIGHT GREEN	S 2020-G90Y	0,76	52,8	25128131	25133131	25070131	✓*	UNI STAIRS bright anis 25172121	UNI super white 26500221	1411 012	1287639	
	SOFT ORANGE	S 2030-Y60R	0,66	41,3	25128132	25133132	25070132	✓*	UNI STAIRS bright orange 25172119	UNI super white 26500221	1411 012	1287877	
	SOFT PINK	S 1030-R20B	0,73	40,4	25128135	25133135	✓*	✓*	UNI STAIRS medium grey 25172123	UNI super white 26500221	1411 012	1287190	
	SOFT WATER	S 2010-G	0,75	49,3	25128134	25133134	25070134	✓*	OAK TREE STAIRS grey 25171031	UNI green celadon 26500038	1411 035	1287875	
	SOFT YELLOW	S 1030-Y	0,84	55,1	25128133	25133133	25070133	✓*	UNI STAIRS bright yellow 25172120	TISSE light yellow 26500055	1411 012	1287596	
TWINE	DARK GREY	S 5500-N	0,44	19,3	25128138	25133138	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 047	1287183	
	TURQUOISE	S 5005-B80G	0,48	19	25128139	25133139	✓*	✓*	NEON STAIRS bright ice blue 25172029	UNI green celadon 26500038	1411 036	1287362	
	INDIGO	S 6010-R70B	0,34	13,5	25128140	25133140	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 044	1287409	
UNI	BLACK	S 8502-B	0,16	5,4	25131939	25136939	—	—	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 052	1287314	
	BRIGHT ANIS	S 2050-G90Y	0,69	41,8	25131931	25136931	—	—	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 036	1287598	
	BRIGHT DARK TURQUOISE	S 4040-B30G	0,38	15,9	25131933	25136933	—	—	UNI STAIRS bright ice blue 25172122	UNI bright dark turquoise 26500040	1411 011	1287564	
	BRIGHT EXTREME BLUE	S 4050-R80B	0,29	9,3	25131941	25136941	—	—	UNI STAIRS medium grey 25172123	UNI bright extreme blue 26500042	1411 039	1287873	
	BRIGHT ICE BLUE	S 2020-B50G	0,7	40,3	25131932	25136932	—	—	UNI STAIRS bright ice blue 25172122	UNI bright ice blue 26500048	1411 044	1287188	
	BRIGHT ORANGE	S 2060-Y70R	0,47	23,4	25131929	25136929	—	—	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 020	1287646	
	BRIGHT PINK	S 3050-R20B	0,34	17,5	25131927	25136927	—	—	UNI STAIRS medium grey 25172123	UNI super white 26500221	1411 012	1287874	
	BRIGHT RED	S 2070-Y90R	0,33	15,1	25131928	25136928	—	—	UNI STAIRS medium grey 25172123	UNI bright red 26500045	1411 019	1287463	
	BRIGHT TURQUOISE	S 3040-B40G	0,49	27,5	25131926	25136926	—	—	UNI STAIRS bright ice blue 25172122	UNI bright turquoise 26500046	1411 044	1287871	
	BRIGHT YELLOW	S 2050-Y10R	0,69	43,7	25131930	25136930	—	—	UNI STAIRS bright yellow 25172120	UNI bright yellow 26500037	1411 008	1287595	
	DARK BEIGE	S 4005-Y20R	0,57	27,5	25131918	25136918	—	—	UNI STAIRS dark beige 25172116	TISSE grey beige 26500057	1411 009	1287830	
	DARK GREY	S 6502-B	0,33	13,9	25131916	25136916	—	—	UNI STAIRS grey 25172117	UNI dark grey 26500041	1411 052	1287836	
	INTENSE JEAN	S 5020-B	0,36	15,5	25131943	25136943	—	—	UNI STAIRS medium alu 25172118	TISSE blue 26500010	1411 041	1287876	
	INTENSE KAKI	S 5005-G50Y	0,48	24,7	25131934	25136934	—	—	UNI STAIRS medium alu 25172118	BRUSHED METAL silver 26500054	1411 011	1287330	
	INTENSE OLIVE	S 3030-G90Y	0,63	38	25131938	25136938	—	—	UNI STAIRS medium alu 25172118	UNI intense olive 26500047	1411 009	1287869	
	INTENSE PETROLE	S 5020-B30G	0,39	15,7	25131935	25136935	—	—	UNI STAIRS bright ice blue 25172122	UNI dark aqua 26500135	1411 044	1287201	
	INTENSE PLUM	S 6020-R10B	0,26	8,7	25131937	25136937	—	—	UNI STAIRS dark beige 25172116	UNI intense plum 26500051	1411 021	1287872	
	INTENSE TERRACOTTA	S 3040-Y70R	0,48	23,2	25131942	25136942	—	—	TISSAGE STAIRS soft grege 25171032	TISSE grey 2650004	1411 026	1287517	
	INTENSE WATER	S 3020-B90G	0,61	34,6	25131936	25136936	—	—	TISSAGE STAIRS soft grege 25171032	UNI green celadon 26500038	1411 035	1287218	
	MEDIUM GREY	S 3502-B	0,62	36,7	25131917	25136917	—	—	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 010	1288341	
	WARM GREY	S 5500-N	0,44	19,3	25131925	25136925	—	—	UNI STAIRS medium grey 25172123	UNI warm grey 26500043	1411 010	1287832	
	WHITE	S 1002-G50Y	0,89	70,4	25131940	25136940	—	—	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 048	1287273	
ALLOVER WOOD	BLACK	S 6005-Y80R	0,38	14,8	25129713	25134713	25072713	—	ESQUISSE STAIRS dark grey 25171015	BRUSHED METAL silver 26500054	1411 054	1287333	
	GREGE	S 3010-Y20R	0,66	34,4	25129711	25134711	✓*	—	OAK TREE STAIRS beige 25171030	UNI light beige 26500122	1411 027	1287437	
	WHITE	S 3005-Y50R	0,65	45,6	25129714	25134714	25072714	—	UNI STAIRS dark beige 25172116	CONCRETE chalk 26500059	1411 008	1287290	26761110
BEECH LONGSTRIPE	LIGHT	S 3020-Y20R	0,62	32,1	25127102	25132102	✓*	—	UNI STAIRS medium alu 25172118	TISSE warm grey 26500005	1411 054	1294315	
	MEDIUM	S 4010-Y10R	0,59	28,4	25127027	25132027	✓*	—	TISSAGE STAIRS soft grege 25171032	CONCRETE chalk 26500059	1411 051	1287732	
FIBER WOOD	GREGE	S 3010-Y30R	0,66	37,9	25128302	25133302	✓*	✓*	ESQUISSE STAIRS light grey 25171018	CONCRETE cool grey 26500058	1411 054	1287433	
	NATURAL	S 4005-Y50R	0,56	28,2	25128303	25133303	✓*	✓*	OAK TREE STAIRS beige 25171030	BRUSHED METAL gold 2650005			

EXCELLENCE

TENDER SPECIFICATIONS

Tapiflex Excellence 80

The selected flooring similar to Tapiflex Excellence 80 belongs to the acoustic vinyl floors category under EN standard 649, available in 2m wide sheet with a Group T wear rating.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The product is built with a high density foam backing reinforced with glass fibre and a high quality printed design. The **wear layer of 0.80 mm** is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance ≤ 0.03 mm.

It has an **acoustic performance of 19 dB and a static indentation resistance ≤ 0.10 mm.**

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below $10 \mu\text{g}/\text{m}^3$.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme..

Accent Excellence comes with a 10 Year Warranty.

Tapiflex Excellence comes with a 10 Year Warranty.

Accent Excellence 80

The selected flooring similar to Accent Excellence 80 belongs to the compact vinyl floors category under ISO standard 10582, available in 2m wide sheet with a Type I binder content.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The wear layer of 0.80 mm is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance ≤ 0.03 mm.

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below $10 \mu\text{g}/\text{m}^3$.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme..

Accent Excellence comes with a 10 Year Warranty.

SPECIFICATION DATA

The Excellence range, with its 127 decors offers one of the most highly creative heavy-traffic heterogeneous vinyl solutions on the market. The range is 100% phthalate free and the VOC in air emission rate is very low; less than $10 \mu\text{g}/\text{m}^3$. The range includes acoustic solutions (19dB) roll and tile formats and a compact and a loose-lay option, all with a 10 year product warranty.

TECHNICAL DATA	STANDARD	TAPIFLEX EXCELLENCE 80 (SHEET)	TAPIFLEX TILES 65	ACCENT EXCELLENCE 80 (SHEET)	ACCENT UNIK (SHEET) Loose Lay Offer
CLASSIFICATION					
Classification	EN 651 EN ISO 10582 EN ISO 10874	Heterogeneous Acoustic Vinyl -	Heterogeneous Acoustic Vinyl -	-	-
Wear group	EN 651	T	T	-	-
Wear layer binder content	EN ISO 10582	-	-	Type I	Type I
TECHNICAL CHARACTERISTICS					
Total thickness	EN ISO 24346	3.25 mm	3.45 mm	2.00 mm	2.10 mm
Total weight	EN ISO 23997	3250 g/m ²	3407 g/m ²	3100 g/m ²	3140 g/m ²
Wear layer thickness	EN ISO 24340	0.80 mm	0.65 mm	0.80 mm	0.80 mm
Form of delivery	EN ISO 24341 (rolls) ISO 24342 (tiles)	approx. 23 running metres x 200 cm -	-	approx. 23 running metres x 200 cm 50 x 50 cm - 20 tiles/box = 5.00 m ²	approx. 23 running metres x 200 cm -
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)					
Declaration of Performance	EN 14041	0120-0074-DoP-2017-12	0120-0060-DoP-2014-05	0120-0004-DoP-2013-04	0120-0044-DoP-2013-04
Reaction to fire	EN 13501-1	B _r -s1 glued over any A ₂ or A ₁ substrate (concrete) C _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A ₂ or A ₁ substrate (concrete) C _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A ₂ or A ₁ substrate (concrete) B _r -s1 glued over any derivate wood substrate	B _r -s1 glued over any A ₂ or A ₁ substrate (concrete) B _r -s1 glued over any derivate wood substrate
Electrostatic properties	EN 1815	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV
Thermal resistance	EN ISO 10456	0.04 m ² K/W	0.04 m ² K/W	0.02 m ² K/W	0.02 m ² K/W
Slip resistance	EN 13893	≥ 0.3	≥ 0.3	≥ 0.3	≥ 0.3
TECHNICAL PERFORMANCES					
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.20 mm Best measured value*: 0.08 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Best measured value*: 0.10 mm Average measured value*: 0.12 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.03 mm
Impact sound reduction	NF EN ISO 717 / 2	$\Delta L_w = 19$ dB	$\Delta L_w = 19$ dB	$\Delta L_w = 3$ dB	$\Delta L_w = 4$ dB
Acoustical improvement	NF S31-074	$L_{new} < 65$ dB - Class A	$L_{new} < 65$ dB - Class A	$L_{new} < 85$ dB - Class C	$L_{new} < 85$ dB - Class C
Slip resistance ⁽¹⁾	DIN 51130	R9/R10 Woods**	R9	R9/R10 Woods**	R9/R10 Woods**
Furniture leg	EN 424	No damage	No damage	No damage	No damage
Castor chair	ISO 4918	No damage	No damage	No damage	No damage
Curl resultant to heat	EN ISO 23999	$\leq 8 $ mm	$\leq 2 $ mm	$\leq 8 $ mm	$\leq 8 $ mm
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6
Dimensional stability	EN ISO 23999	$< 0.10\%$	$< 0.10\%$	$< 0.10\%$	$< 0.10\%$
Chemical resistance	EN ISO 26987	Not affected	Not affected	Not affected	Not affected
Underfloor heating		Suitable	Suitable	Suitable	Suitable
ENVIRONMENTAL PERFORMANCES					
Total VOC emissions	ISO 16000-9	$\leq 10 \mu\text{g}/\text{m}^3$ (after 28 days)			
Formaldehyde	ISO 16000-3	$< 10 \mu\text{g}/\text{m}^3$ (after 28 days)			
COLOURS					
		132	12	132	15

The above information is subject to modification for the benefit of further improvement. (09/19).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF : 4820 5000 00

TARKETT SUSTAINABILITY TAG	Tapiflex Excellence 80	100 % Recyclable	PHthalate Free	Tapiflex Tiles 65	100 % Recyclable	PHthalate Free	Accent Excellence 80	100 % Recyclable	PHthalate Free	Accent Unik	100 % Recyclable	PHthalate Free
*For information - not binding. **Long Modern Oak, Oak Tree, Scandinavian Oak, Serene Oak. ⁽¹⁾ Please note that slip resistance may be impacted by usage and cleaning operations. ⁽²⁾ For Accent Unik, please contact your sales representative. According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com												

Disclaimer : Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

More excellent reasons to choose Tarkett Excellence

- ✓ 100% Phthalate Free
- ✓ Optimal indoor air quality
- ✓ TVOC $\leq 10 \mu\text{g}/\text{m}^3$ after 28 days
- ✓ 100% recyclable
- ✓ FloorScore® certified
- ✓ ISO 14001 certified production site
- ✓ REACH Compliant and CE Marking

www.tarkett.com

